


B形管

(日本工業規格)

呼び径	内径 D	厚さ T	長さ L	寸法		価格		重量
				l ₂	D ₄	1種管	2種管	
mm	mm	mm	mm	mm	mm	円	円	kg
150	150	26	2,000	90	262	別途見積	別途見積	77
200	200	27	"	"	316			103
250	250	28	"	"	370			131
300	300	30	"	"	424			165
350	350	32	"	"	482			204
400	400	35	2,430	95	544			306
450	450	38	"	"	606			373
500	500	42	"	"	672			459
600	600	50	"	100	804			660
700	700	58	"	105	936			899
800	800	66	"	110	1,068			1,170
900	900	75	"	115	1,204			1,520
1,000	1,000	82	"	120	1,332			1,850
1,100	1,100	88	"	125	1,458			2,190
1,200	1,200	95	"	130	1,586			2,600
1,350	1,350	103	"	135	1,768			3,190

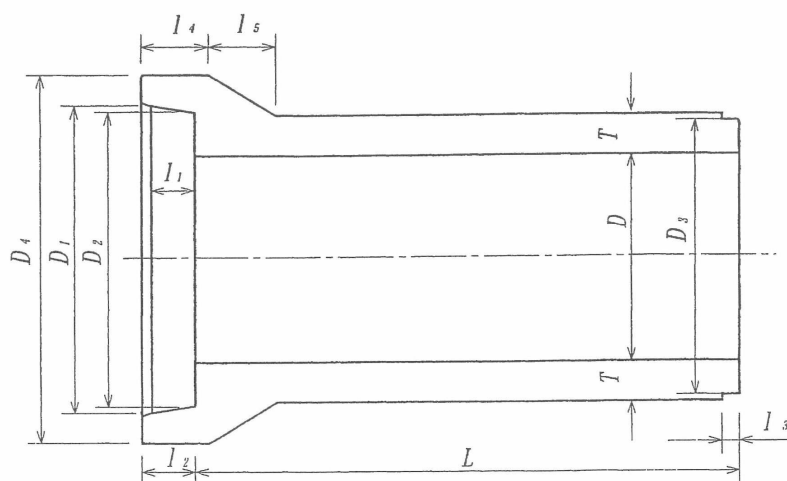

NC形管

(日本工業規格)

呼び径	内 径 D	厚さ T	長 さ L	寸 法		価 格		重 量
				l 1	l 2	1 種 管	2 種 管	
mm	mm	mm	mm	mm	mm	別途見積		kg
1,500	1,500	112	2,360	62	52			3,270
1,650	1,650	120	"	"	"			3,850
1,800	1,800	127	"	"	"			4,430
2,000	2,000	145	"	67	57			5,640
2,200	2,200	160	"	"	"			6,840
2,400	2,400	175	"	72	62			8,170
2,600	2,600	190	"	"	"			9,610
2,800	2,800	205	"	77	67			11,200
3,000	3,000	220	"	"	"			12,800

備考 (B形管・NC形管に適用)

1. 納入時、4 t 車指定の場合と早朝・夜間搬入指定の場合は別途実費負担願います。
2. φ 1,200mm以上は車上渡し。
3. 上記価格はゴムリング共の価格。
4. 滑材 (kg当 800 円)、止水滑材 (kg当 2,500 円) は実費お買い上げいただきます。

